

# LED CUT-OFF WALL PACK BOLWPI

## DESCRIPTION


Designed to deliver high performance and energy efficient illumination, Blue Ocean's BOLWPI Wall Pack series replaces traditional HID Wall Pack fixtures. Die cast aluminum housing with powder coated finish, hinged removable door and sealed gasketed optical compartment protect the fixture from rust, corrosion, contaminants and insects, together with an IP65 rating for damp locations. This fixture delivers excellent thermal performance, high efficacy and colour consistency, and a tempered glass and highly reflective anodized reflector, providing optimized illumination with no shelter angle and no glare. Professional heatsink ensures excellent thermal management inside the fixture for prolonged life. Suggested applications: building entrances, stairways, schools, hospitals, commercial buildings, or anywhere security lighting is needed.



IP RATING  
**65**



## DRAWING

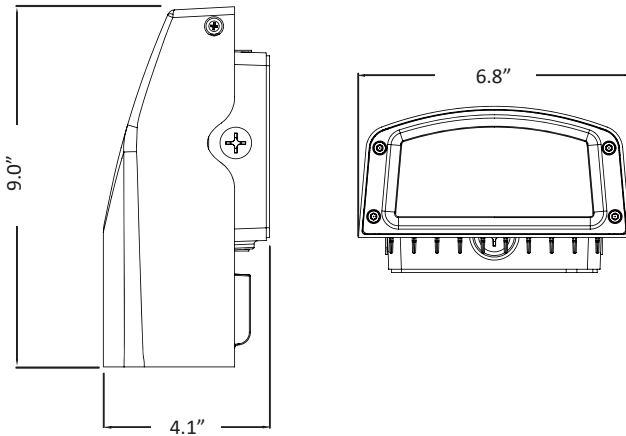

## SPECIFICATION CHART

Model No.	BOLWPI-XX
Voltage	120-277VAC
Wattage	30W   40W
Replacement	100W   120W HPS/MH
Lumen Output	3000lm   4000lm
CRI	>70
PFC	0.95
CCT	4000K   5000K
Distribution	Type III
Finish	Dark Bronze
Max Adjustable Angel	20 degree
Dimension	9.0"X6.8"X4.1"
Operating Temperature	-40~40°C

## ORDERING INFORMATION


<b>Series No.</b> BOLWPI	<b>Wattage</b> 30W=30W 40W=40W	<b>Voltage</b> 27V=120-277VAC	<b>CCT</b> 40K=4000K 50K=5000K	<b>Finish</b> D=Dark Bronze	<b>Photocell</b> P2=Photocell	<b>Distribution</b> T3=Type III
-----------------------------	--------------------------------------	----------------------------------	--------------------------------------	--------------------------------	----------------------------------	------------------------------------

**PHOTOMETRIC SPEC**

# BLUE OCEAN LIGHTING™

## BOLWPI30W



15' Mounting Height

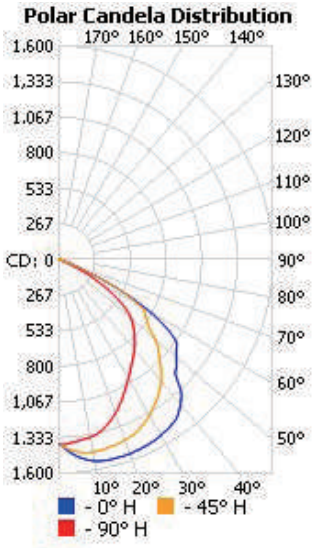

**Illuminance at a Distance**


Distance	Center Beam LUX	Beam Width
2.5ft	2,390 LUX	4.9 ft 5.5 ft
5.0ft	598 LUX	9.8 ft 11.0 ft
7.5ft	266 LUX	14.7 ft 16.5 ft
10.0ft	149 LUX	19.6 ft 22.0 ft
12.5ft	95.6 LUX	24.5 ft 27.4 ft
15.0ft	66.4 LUX	29.4 ft 32.9 ft

■ Vert. Spread: 88.8°  
 ■ Horiz. Spread: 95.3°

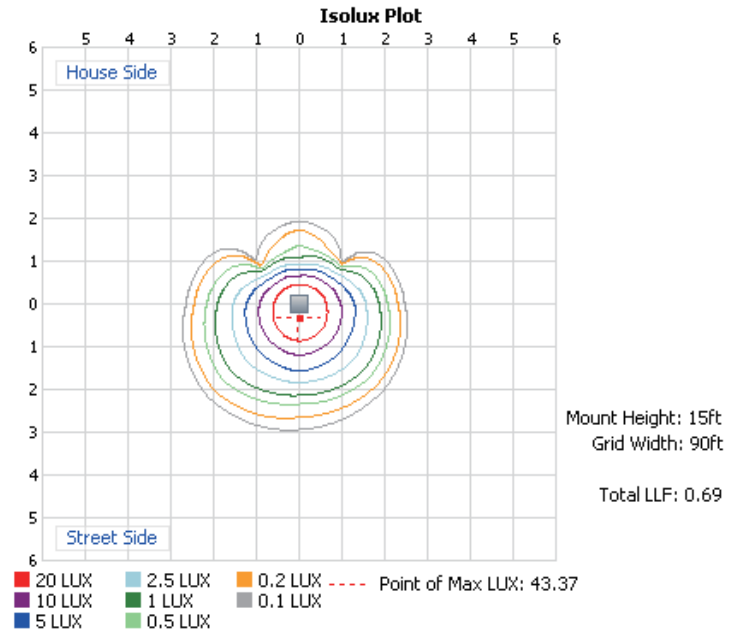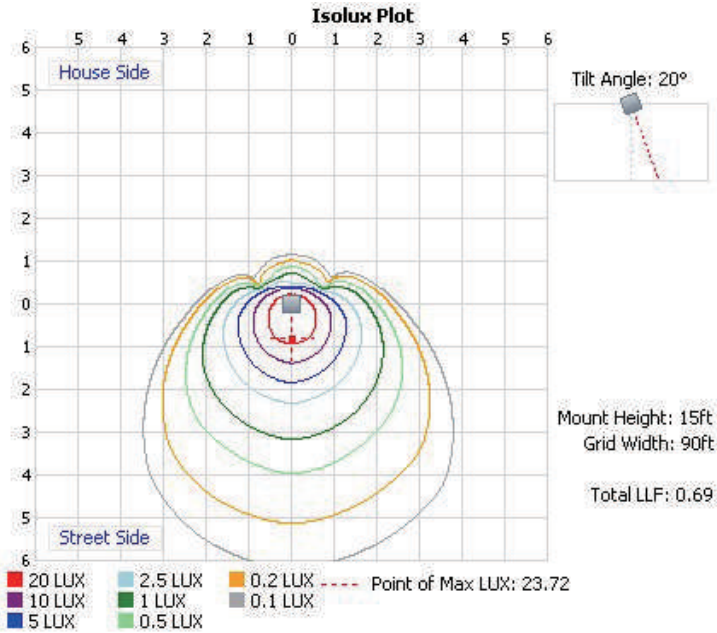

**PHOTOMETRIC SPEC**

**BLUE OCEAN LIGHTING™**  
**BOLWPI40W**  
 15' Mounting Height

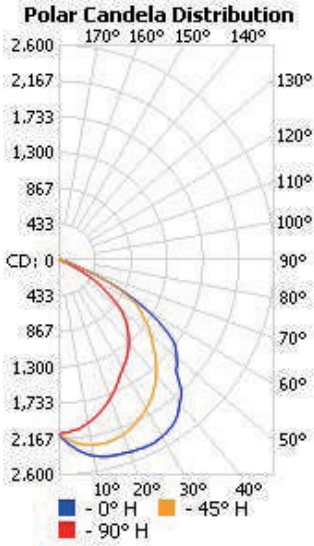

**Illuminance at a Distance**

Distance	Center Beam LUX	Beam Width
2.5ft	3,645 LUX	4.7 ft 5.0 ft
5.0ft	911 LUX	9.3 ft 10.0 ft
7.5ft	405 LUX	14.0 ft 15.0 ft
10.0ft	228 LUX	18.7 ft 20.0 ft
12.5ft	146 LUX	23.3 ft 25.0 ft
15.0ft	101 LUX	28.0 ft 29.9 ft

■ Vert. Spread: 86.1°  
 ■ Horiz. Spread: 89.9°

