


LED WALL PACK


BOLWPF

DESCRIPTION

Designed to deliver high performance and energy efficient illumination, Blue Ocean's BOLWPF Wall Pack series replaces traditional fluorescent, high pressure sodium and metal halide lighting fixtures, delivering exceedingly comfortable light with silent and flicker-free operation and minimized lumen depreciation. Die cast aluminum housing with powder coated finish and sealed gasketed optical compartment protect the fixture from rust, corrosion, contaminants and insects, together with an IP65 rating for damp and wet locations. Full cut-off design complies with Dark Sky requirement. Type III polycarbonate optical lens with UV stabilizers, superior LED chip and UL class 2 high-performance driver together provide excellent thermal performance, high efficacy and great color consistency. Suggested applications: building entrances, stairways, schools, hospitals, hotels, industrial and commercial buildings, and anywhere security lighting is needed.



DRAWING

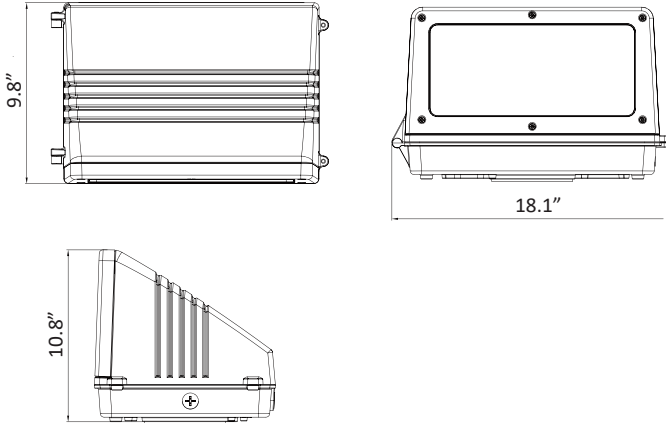

SPECIFICATION CHART


Model	BOLWPF135W
Voltage	120-277VAC
Wattage	135W
Replacement	250W HID
Lumen Output	13000lm
CRI	80
PFC	0.9
CCT	5000K
Dimension	18.1"X9.8"X10.8"
Operating Temp.	-40~40°C
Finish	Dark Bronze
Mounting	Wall Mount

ORDERING INFORMATION

Series No. BOLWPF	Wattage 135W=135W	Voltage 27V=100-277VAC	CCT 50K=5000K	Finish D=Dark Bronze
-----------------------------	-----------------------------	----------------------------------	-------------------------	--------------------------------

PHOTOMETRIC SPEC


BLUE OCEAN LIGHTING™
BOLWPF135W27V50KD
 16' Mounting Height

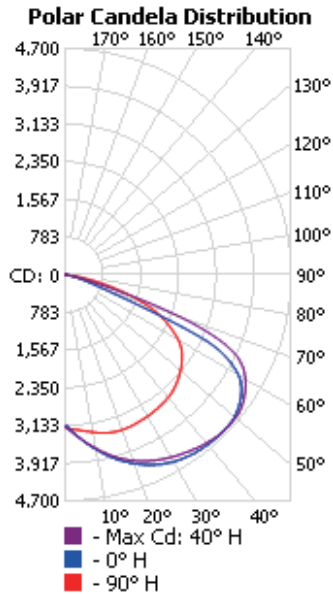

Illuminance at a Distance

Distance	Center Beam LUX	Beam Width
2.7ft	4,673 LUX	5.5 ft 11.8 ft
5.3ft	1,213 LUX	10.9 ft 23.2 ft
8.0ft	532 LUX	16.4 ft 35.0 ft
10.7ft	298 LUX	21.9 ft 46.8 ft
13.3ft	193 LUX	27.2 ft 58.2 ft
16.0ft	133 LUX	32.8 ft 70.1 ft

■ Vert. Spread: 91.4°
 ■ Horiz. Spread: 130.9°

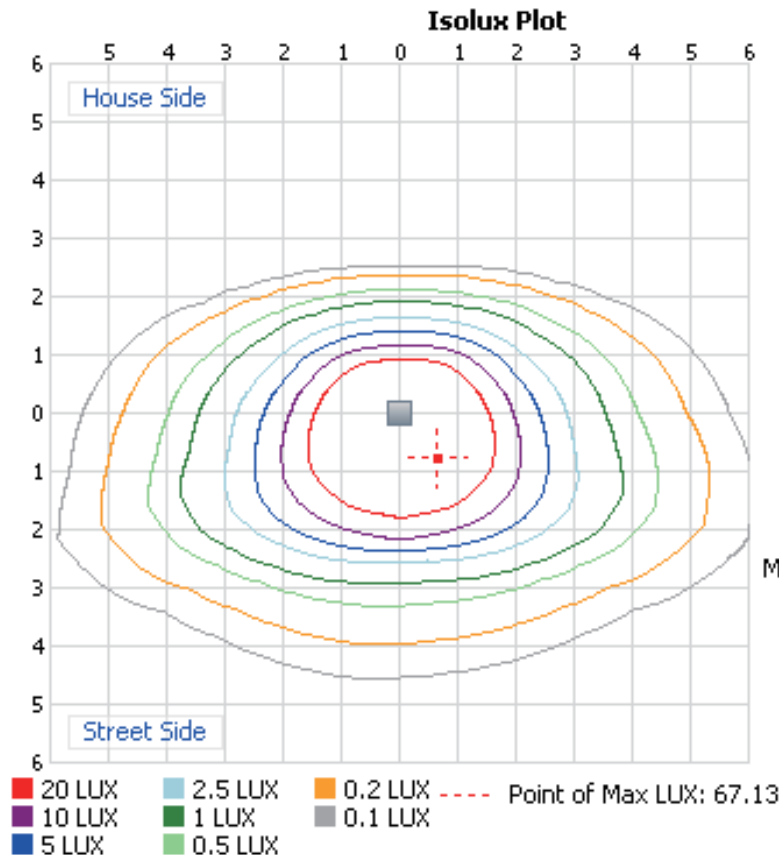

Mount Height: 16ft
 Grid Width: 96ft
 Total LLF: 1